




KBU4, KBU6, KBU8, & KBU10


EDI Single-4 to 10 Ampere Commercial Grade Bridges

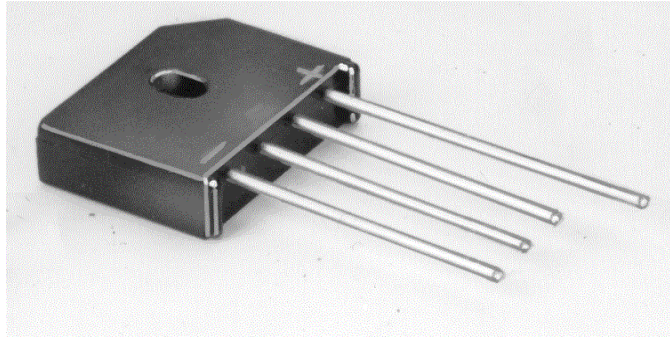

PRV/Leg	50V	100V	200V	400V	600V	800V	1000V
KBU4 SERIES 2 A.	KBU401	KBU402	KBU403	KBU404	KBU405	KBU406	KBU407
KBU6 SERIES 1 A.	KBU601	KBU602	KBU603	KBU604	KBU605	KBU606	KBU607
KBU8 SERIES 1.5 A.	KBU801	KBU802	KBU803	KBU804	KBU805	KBU806	KBU807
KBU10 SERIES 2 A.	KBU1001	KBU1002	KBU1003	KBU1004	KBU1005	KBU1006	KBU1007

Electrical Characteristics at $T_A = 25^\circ\text{C}$ Unless Otherwise Specified	Unit	KBU4	KBU6	KBU8	KBU10
		Series	Series	Series	Series
Average Output Current, $I_O @ 50^\circ\text{C } T_C$	Amp	4	6	8	10
Max. Forward Voltage Drop, $V_{FM} = 1.1\text{V} @ I_F =$	Amp	2	3	4	5
Max. DC Reverse Current @ PRV I_R	μA	10	10	10	10
Max Peak Surge Current, $I_{FSM} (8.3\text{ms})$	Amp	200	200	200	200

DIAGRAMS

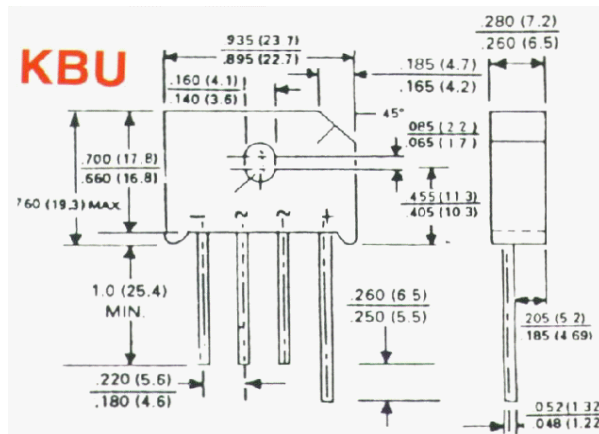

EDI reserves the right to change these specifications at any time without notice.

ELECTRONIC DEVICES, INC. DESIGNER AND MANUFACTURERS OF SOLID STATE DEVICES SINCE 1951.

- 21 GRAY OAKS AVENUE. YONKERS, NEW YORK, 10710
- 914-965-4400 1-800-678-0828
- FAX: 914-965-5531
- e-mail: sales@EDIdiodes.com web site: www.EDIdiodes.com